


# CS72E/CS74E

## 2/4-Port PS/2 KVM Switch


- The KVM (Keyboard, Video, and Mouse) switch is a control unit that allows access to two/four computers from a single console (keyboard, monitor, and mouse). With its custom designed connectors, the significantly reduces the number of ports required for a 2/4 port KVM switch. The design features a custom SPHD-15 male connector for the keyboard, video, and mouse, and SPHD-15 female connectors for the cables that connect the switch to the computers.



### Features

- One console controls two or for computers – Non-powered
- Logical connector layout – SPHD-15 connectors at rear panel for PC and console connections
- Supports Microsoft IntelliMouse and the scrolling wheel on most mice
- Easy to operate – Computer selection via push button switches and hotkeys
- Power on detection – automatically switching to the first powered on port
- Auto scan function to monitor computer operation
- Superior video quality – supports resolution of up to 2048 x 1536; DDC2B

### CS72E (Rear)

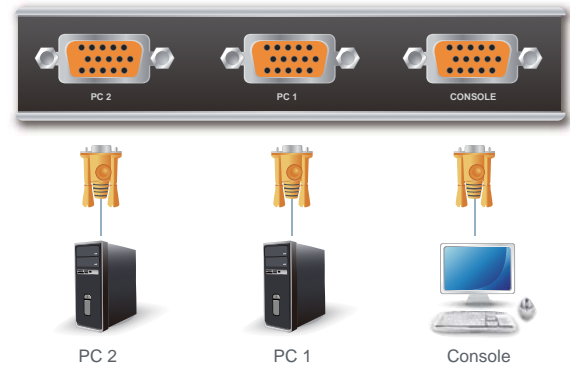

### Specification

Function		CS72E	CS74E	
Computer Connections		2	4	
Port Selection		Hotkey, Pushbutton		
Connectors	Console Ports	1 x SPHD-15 Male (Yellow)	1 x SPHD-15 Male (Yellow)	
	KVM Ports	Keyboard	2 x SPHD-15 Female (Yellow)	4 x SPHD-15 Female (Yellow)
		Video		
	Mouse			
Power		1 x DC Jack (Black)	1 x DC Jack (Black)	
Switches	Port	2 x Pushbutton	4 x Pushbutton	
LEDs	Selected	2 (Green)	4 (Green)	
Emulation	Keyboard/ Mouse	PS/2		
Video		2048 x 1536; DDC2B		
Scan Interval		5 Seconds		
Power Consumption		DC9V, 0.9W	DC9V, 1.35W	
Environment	Operating Temp.	0-50°C		
	Storage Temp.	-20-60°C		
	Humidity	0~80% RH, Non-condensing		
Physical Properties	Housing	Metal		
	Weight	0.32 kg	0.49 kg	
	Dimensions (L x W x H)	12.00 x 8.00 x 2.50 cm	19.70 x 8.00 x 2.50 cm	

